ROBBIA

顾美GUMEI

艺 墅 生 活　顾 美 缔 造

佛山顾美铝艺建材有限公司

Foshan Gumei Aluminum Art Building Material Co., Ltd

Web:gm-outdoor.com

Email:info@gm-outdoor.com

WhatsApp/Wechat/Tel:+86 15015847087

Area B,Qixing Industrial Park,Luocun,Shishan
NanhaiDistrict,Foshan City,Cuangdong Province,China

GOOD PRODUCT BIG BRAND

We strive for excellence

Aim for products to meet the needs of every customer

MEET NEEDS

Customer needs come first.

In terms of customer needs, we have a rich product line and a variety of solutions to provide, which will definitely meet your needs.

GOOD QUALITY

Quality is not only product quality, but also product appearance, function, service, etc. Whether our product quality is excellent, after-sales convenience, complete functions, simple and convenient operation, and high overall aesthetics.

GOOD EXPERIENCE

Experience is the reaction and changes that customers produce after they come into contact with products, systems, and services.A good experience makes customers feel amazing when they touch the product, feel happy when using the product, and feel satisfied after using it.

LEADING THE LIFE

of thousands of familiesCreate a beautiful space

ABOUT US

Care
Do every door and window

Materials Used
Process every detail

Insist
Every research attitude

The company is a modem enterprse ntgratig R8D,desin, producion,sales and servce. Ithas a strong RaD team and strong comprehesive develooment strengthi adols mtemationa advanced produclon equloment and specalzes in producg hich-grade alumnum aloy door and window system broken brde alumintum docr andwindow system. sunshine roo and oher seres of oroducls. Wth cod comoary reoutaton proessiona service and frst-dass gully, thas won the rust and sunport 0icustomers at home and abroad.

Since ts estabishmenl, the company has aways adhered to the 'eople-onented" busness philosothy. focusing on persomne raning and resernve in produclionsales and senvice. and at the same me usn eficlent maraoment syslem, so hat entervrses contnue to thrive in a virtuous crece, adhere to dedcaled service, honesmanaemenl. stedy develooment and so on. So as lo provide customers whh the best oually sevce. Adherina to the core conceot of trecardno quallv as ife. sekintevelcoment win snceniy. we wl oenerate the sornt o seko oraatno rom Cerany into every nk. stve to create the best aualvy producs. so that the oroducs havtthe advantaoes of beauly, energy savng and stron sealna. We wil provide customers with personalzed soluons for hich-end alumrum aloy door and window systemsand achieve a new model of high-end door and window industry

In the fulure,we wilcontinue to adhere to the core concept of gually as the root and honesty as the foundaton, create a gren envronmentalfe, lead fashion and healthand create a war home of elegance and comfort for vou.

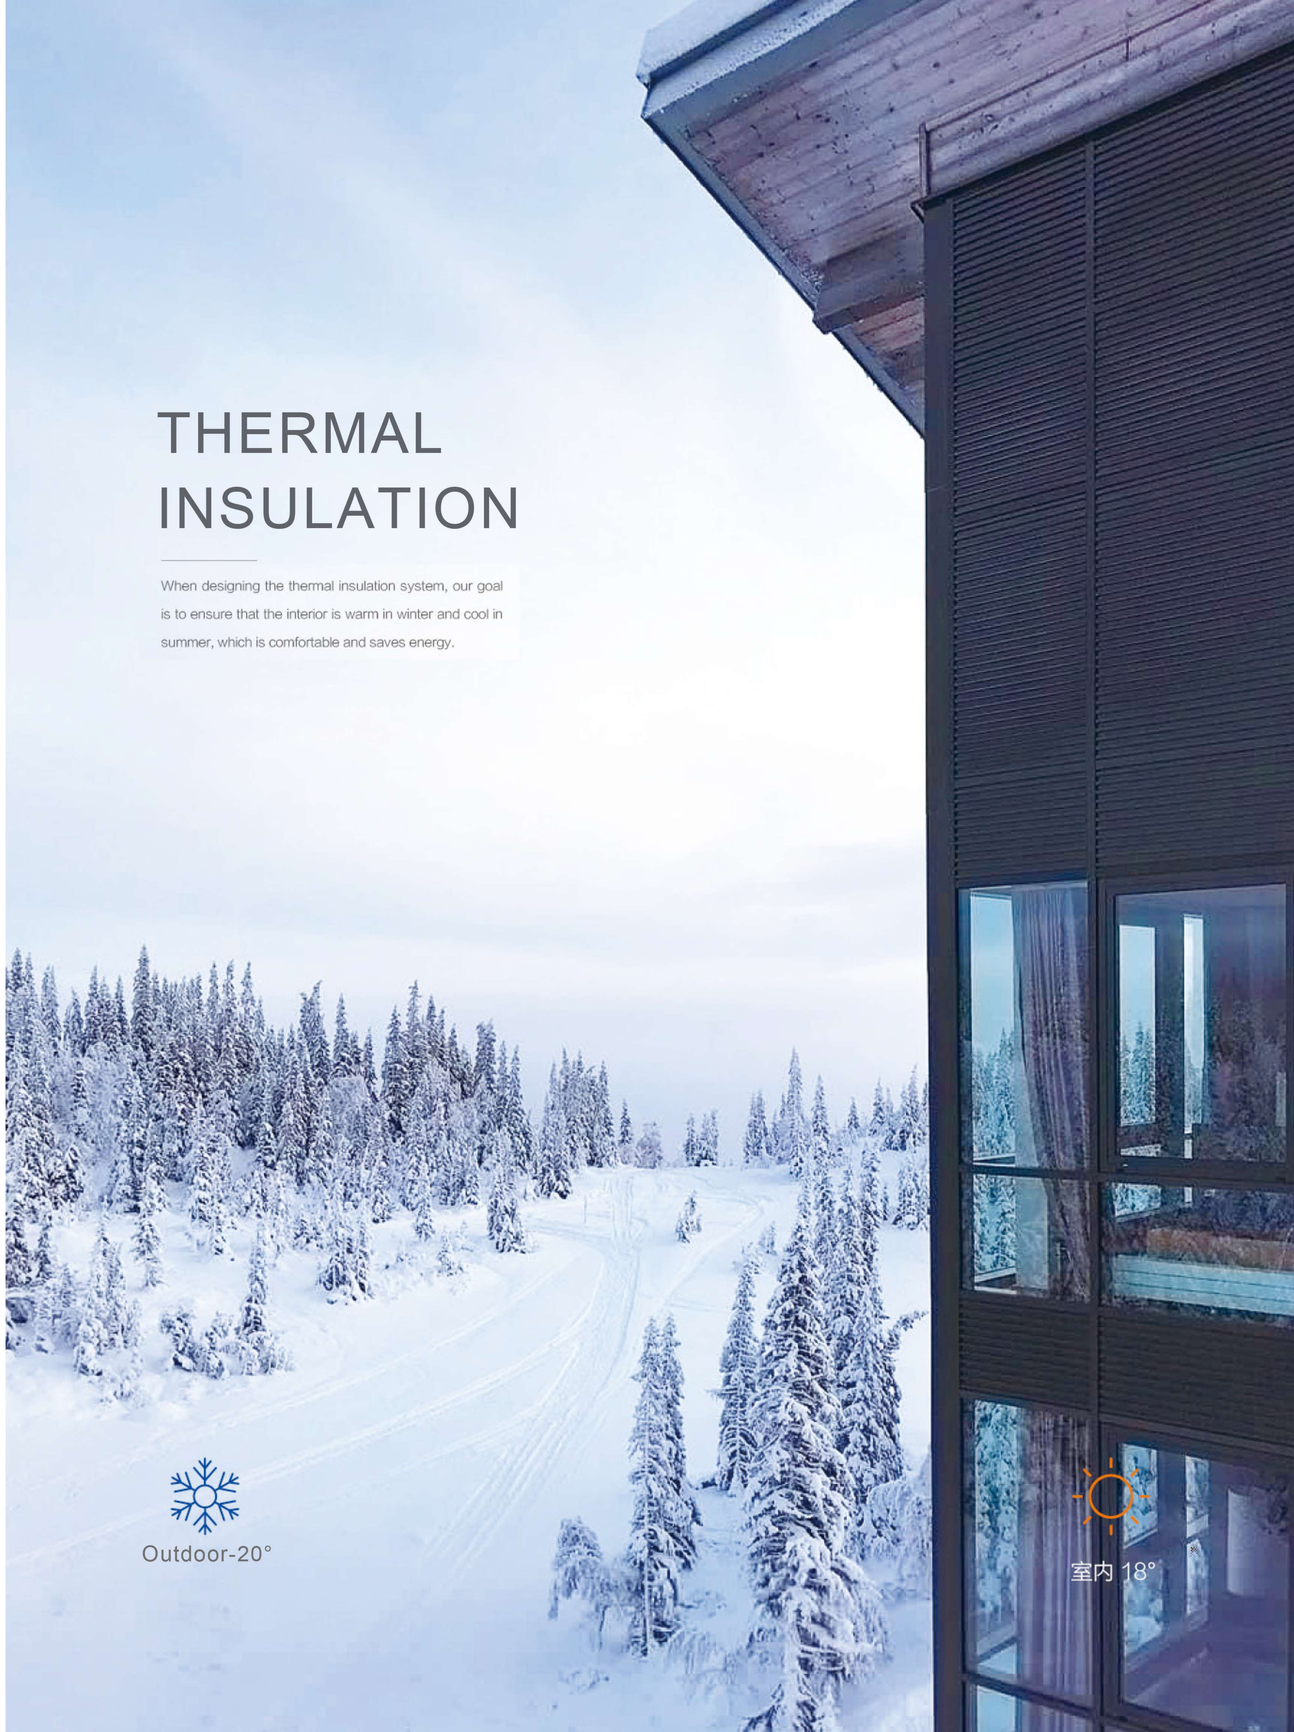

COMFORTABLE

BUILD A SAFE AND COMFORTABLE HOME ENVIRONMENT
START WITH EVERY DETAIL, WINDOW BY DOOR

Pin injection process

The Angle of frame fan adopts German pin injection technology to ensure the structural strength of the product and improve its stability, sealing and waterproof performance.

Glue Angle coding process

Compared with the traditional corner code, it can improve the air tightness and water tightness, effectively prevent the water resistance and window corner seepage, and prevent the local deformation and cracking of the window corner.

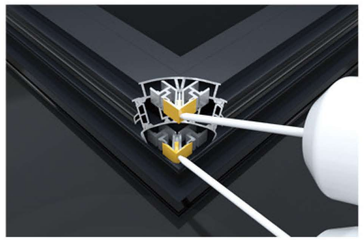

SECURITY

360° Safe Anti-Prying

Super strong technology realizes 360-degree all-round
safety and broadcast preventionPut an end to the possibility of prying
doors and windows into the house, and jointly create a safe living space.

THERMAL INSULATION SYSTEM

Thermal insulation, a home that is like spring all the year round

When designing the thermal insulation system for doors and windows, our goal is to make your home warm in winter and cool in summer

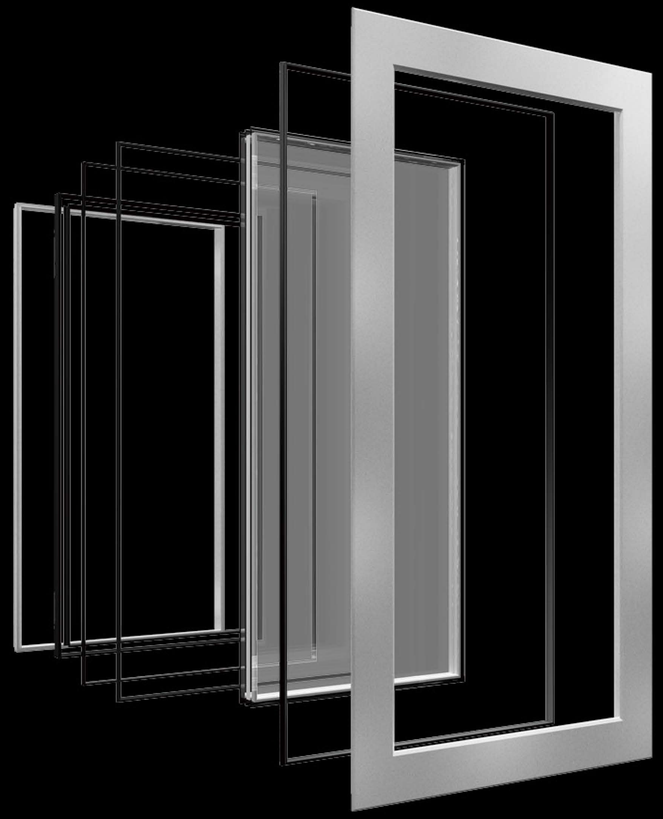

Article PA66 insulation

Effectively block the conduction of heat on the profile
So as to play a good thermal insulation performance.

Ultra - wide multi - cavity insulation strip

Effectively block the conduction of heat on the profile
So as to play a good thermal insulation performance.

Epdm composite foam rubber strip

Good weather resistance, better sealing and improved water tightness
Air tightness, better sound insulation effect

Sound Insulation System | Aesthetic System | Waterproof System | Insulation System

Sound insulation and noise reduction technology

The sound insulation performance of doors and windows depends on the glass configuration, frame material and strip system. The doors and windows of the left ear are made of double-layer or triple-layer vacuum glass, high-precision broken bridge aluminum, rubber strips and other materials. Layer cut-off reflection reduction to achieve excellent sound insulation and noise reduction effect

Dust-proof and anti-seepage technology

Handling the sealing of doors and windows can not only effectively improve the moisture-proof and dust-proof performance of the house, but also strengthen the fireproof and sound insulation effects of the building. Dao's original high-grade sealing rubber strip ensures that the frame and fan overlap seamlessly and improves the overall waterproof performance.

Thermal insulation technology

Doors and windows have always been the weak link in thermal insulation, and their heat loss accounts for more than 36% of the heat loss of the entire building. Through the unique and diversified combination of profile broken bridges and heat-insulating glass, the doors and windows of the left ear can show excellent thermal insulation effects under different climatic conditions, thereby improving the overall protection of the building in terms of temperature, hearing, vision and health. comfort.

Anti-theft anti-pry technology

Villas or low-rise residences located in the suburbs need to consider anti-theft and pry-proof performance. The left ear product is equipped with tamper-proof hardware and explosion-proof glass. After deep processing such as laminated glass, the doors and windows have good shock resistance and explosion-proof performance. Hardware system imported from Germany, equipped with multi-lock points and anti-pry handle configuration to ensure that the anti-pry level of doors and windows reaches the highest WK3/RC3 level

EXPERIENCE

SYSTEM DOORS AND
WINDOWS
HIGH PERFORMANCE
EXPERIENCE

High wind pressure resistance technology

"Pressure-resistant structural cavity + glue injection corner code" is combined with anti-pry hardware and explosion-proof glass and other glass deep processing, so that the doors and windows have good wind pressure resistance to create a solid home for you...Our products pass through various A mechanical performance and physical impact test, even in the face of storms, it is still as stable as Mount Tai!

COOPERATIVE PARTNER

德国好博

德国丝吉利娅

德国诺托

意大利吉斯

德国格屋

德国泰诺风

德国皓涛

比利时索槟柯

德国卫士

德国大鸡

海达胶条

德国森佩理特胶条

PRODUCT CATALOG

Window series

- New micro-ventilation system window 03/04
- 75 inward opening system window 05/06
- 86 broken bridge system window 07/08
- 120 comfortable broken bridge system window 09/10
- 120 enjoy broken bridge system window 11/14
- Seamless welded casement window 15/18
- 135 broken bridge window screen integrated casement window 19/22
- 120 broken bridge window screen integrated casement window 23/24
- 123 broken bridge window screen integrated casement window 25/26
- 145 broken bridge window screen integrated casement window 27/30
- 120 narrow side broken bridge window screen integrated casement window 31/32
- 110 broken bridge window screen integrated casement window 33/34
- 100 broken bridge window screen integrated casement window 35/36
- 85 broken bridge window screen integrated casement window 37/38
- 75 non-broken bridge casement window 39/40
- 65 broken bridge casement window 41/42
- 55 broken bridge casement window 43/44
- 50 non-broken bridge casement windows 45/46
- 70 vintage windows 47/50
- 123 Broken bridge three-track sliding window 51/54
- 105 broken bridge sliding window 55/56
- 155 broken bridge sliding window 57/58

Sliding door series

- 190 three-track heavy-duty sliding door 63/72
- 126 imitation heavy sliding door 73/78
- 190 broken bridge heavy sliding door 79/84
- 120 Broken bridge two-track heavy-duty sliding door 85/90
- 120 non-broken bridge two-track heavy-duty sliding door 91/98
- 16 very narrow sliding door 99/104

Flat door series

Folding door series

Outdoor series

- 100 sun room 123/126
- 126 sun room 127/130
- European gazebo / grape trellis 131/134
- New Chinese style gazebo / grape trellis 135/136
- Hanging carport 137/138
- A3 window shed/patio shed 139/140
- A5 window shed/patio shed 141/144

WINDOWS SERIES

GIVE YOU A COMFORTABLE HOME

SERIES

OPTIONAL COLOR

Golden Oak	Yellow pear	Siamese rosewood	Fraxinus mandshurica
Hand-feeled wenge	Thai teak	Enamel white	White skin
Fluorocarbon gray	Bowl empty ash	Starbucks	Classic coffee
Classic Iron Ash	Dark skin	Black coffee	Fluorocarbon Champagne

The New SERIWS 1.4/2.0MM

MICRO VENTILATION WINDOW

Product characteristics

The openable area is small, which can ensure ventilation while taking safety into account. It can be enlarged and fixed to increase the lighting area.

Unique shape design, full of design sense, the overall shape is beautiful.

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

With multi-locking point design, the window sash is tightly fixed around when locked, and the anti-pry protection performance is better.

Configure child safety locks to prevent accidents.

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, and high-end business clubs.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Double-layer hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode



Outward | Open inward | Open top hang | Internal opening and reversing

MICRO VENTILATIONG WINDOW

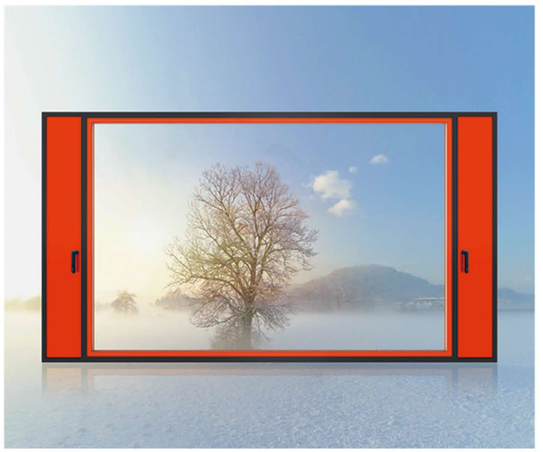

Electric SERIWS 1.4/2.0MM

SLIDING WINDOW

Product characteristics

The openable area is small, which can ensure ventilation while taking safety into account. It can be enlarged and fixed to increase the lighting area.

Unique shape design, full of design sense, the overall shape is beautiful.

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

With multi-locking point design, the window sash is tightly fixed around when locked, and the anti-pry protection performance is better.

Configure child safety locks to prevent accidents.

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, and high-end business clubs.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Double-layer hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode

Pan up and down

MICRO VENTILATIONG WINDOW

The New SERIWS 1.4/2.0MM

SLIDING WINDOW

Product characteristics

The openable area is small, which can ensure ventilation while taking safety into account. It can be enlarged and fixed to increase the lighting area.

Unique shape design, full of design sense, the overall shape is beautiful.

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

With multi-locking point design, the window sash is tightly fixed around when locked, and the anti-pry protection performance is better.

Configure child safety locks to prevent accidents.

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, and high-end business clubs.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Double-layer hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode



Inward opening panning

75 SERIWS 1.4/2.0MM

INSIDE OPEN SYSTEM WINDOW

Product characteristics

Multi-cavity heat insulation strips, equipped with three glass and two cavity hollow explosion-proof glass, sound insulation and heat insulation.

High-quality magnesium-aluminum alloy profiles are selected, and advanced surface treatment technology makes the overall structure stronger, more durable and more beautiful.

Automotive-grade EPDM rubber strip, good sealing performance, so that the indoor is not affected by the bad weather outdoors.

Equipped with child safety lock to prevent accidents.

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, and high-end business clubs.

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+9A+5+9A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode



HAPPY SPACE

Carefully create a space to store happiness, let it edit the happiness of every day,
remember the warmth of each season, and give the world all it gives
The beauty of beauty, all clip into the collection of memories.

86 SERIWS 1.4/2.0MM

BROKEN BRIDGE SYSTEM WINDOW

Product characteristics

Multi-cavity heat insulation strips, equipped with three glass and two cavity hollow explosion-proof glass, sound insulation and heat insulation.

High-quality magnesium-aluminum alloy profiles are selected, and advanced surface treatment technology makes the overall structure stronger, more durable and more beautiful.

Automotive-grade EPDM rubber strip, good sealing performance, so that the indoor is not affected by the bad weather outdoors.

Equipped with child safety lock to prevent accidents.

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, and high-end business clubs.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+9A+5+9A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode



Outward

Internal opening and reversing

DETAIL WITNESS QUALITY

Details are the soul of the overall beauty,
The reasonable use of details and creative combination is beauty.
A good product has its own point of view, details witness quality,
The space with details is aesthetic.

120 SERIWS 1.4/2.0MM

BROKEN BRIDGE SYSTEM WINDOW

Product characteristics

Unique shape design, full of design sense, the overall shape is beautiful.

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

Multi-lock point design, the window sash is tightly fixed around the window when locked, and the anti-pry protection performance is better

Configure child safety locks to prevent accidents

The frame and leaf are designed flush, the appearance is simple and beautiful, and the anti-prying performance is improved at the same time.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode



NEW MULTI CAVITY DESIGN
LET SOUND WAVES DISAPPEAR

120 SERIWS 1.4/2.0MM

BROKEN BRIDGE SYSTEM WINDOW

Product characteristics

Unique shape design, full of design sense, the overall shape is beautiful.

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

Multi-lock point design, the window sash is tightly fixed around the window when locked, and the anti-pry protection performance is better

Configure child safety locks to prevent accidents

The frame and leaf are designed flush, the appearance is simple and beautiful, and the anti-prying performance is improved at the same time.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode



Outward | Open inward | Double inward opening | Open top hang | Internal opening and reversing

The simple operation linkage handle can make the outside of the window sash turn to the indoor, which can clean the window surface conveniently and quickly
Multi point locking improves the sealing and thermal insulation effect of doors and windows.

Soundproofing performance

Thermal insulation performance

Watertight performance

Airtight performance

Wind pressure performance

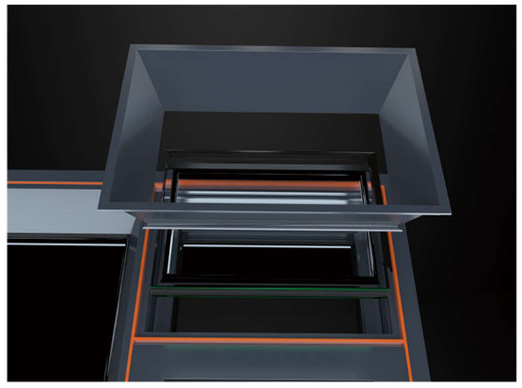

MINIMALIST ATTITUDE
TO LIFE

Seamless Welding

SERIWS 1.4/2.0M

CASEMENT WINDOWS

Product characteristics

Unique shape design of seamless welding, full of design sense, the overall shape is beautiful and safer

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

Multi-lock point design, the window sash is tightly fixed around the window when locked, and the anti-pry protection performance is better

Configure child safety locks to prevent accidents

The frame and leaf are designed flush, the appearance is simple and beautiful, and the anti-prying performance is improved at the same time.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode

Outward | Open inward | Double inward opening | Open top hang | Internal opening and reversing

Let your door and window safety index climb a peak
From now on, say goodbye to the injury of the door and window corners

Soundproofing performance

Thermal insulation performance

Watertight performance

Airtight performance

Wind pressure performance

Seamless welding safety design

Security windows without gaps

Ordinary doors and windows adopt the corner code injection process, which has great defects on the doors and windows. The glue is injected on one side. When encountering heavy wind and rain, the doors and windows will leak water due to the gap, but the interior will be corroded, which seriously shortens the life of the doors and windows.The aluminum outside the left ear door and window adopts a seamless welding design, which has the following advantages;

+ Ultimate beauty

Seamless welding makes the surface smooth and quite textured, thus enhancing the decorative effect of doors and windows.

+ Durable

The seamless welding process can avoid the cracking of glue injection cracks from the root.

+ Anti-reverse seepage

Seamless welding effectively prevents corrosion of internal profiles caused by water seepage.

+ Strengthen the seal

The seamless welding makes the sealing performance of doors and windows stronger.

135 SERIWS 1.4/2.0MM

BRIDGE BROKEN WINDOW SCREEN INTEGRATED
FLAT OPEN WINDOW

Product characteristics

Unique shape design of seamless welding, full of design sense, the overall shape is beautiful and safer

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

Multi-lock point design, the window sash is tightly fixed around the window when locked, and the anti-pry protection performance is better

Configure child safety locks to prevent accidents

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, and high-end business clubs.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode

Outward | Open inward | Double inward opening | Open top hang | Internal opening and reversing



With hidden drainage design,
every detail is created for safer protection

Soundproofing performance

Thermal insulation performance

Watertight performance

Airtight performance

Wind pressure performance

Carefully create a space to store happiness, let it edit the happiness of every day, remember the warmth of every season, and edit all the beauty given by the world into the collection of memories.

120 SERIWS 1.4/2.0MM

BRIDGE BROKEN WINDOW SCREEN INTEGRATED FLAT OPEN WINDOW

Product characteristics

Unique shape design of seamless welding, full of design sense, the overall shape is beautiful and safer

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

Multi-lock point design, the window sash is tightly fixed around the window when locked, and the anti-pry protection performance is better

Configure child safety locks to prevent accidents

Hidden drainage design, using vertical air pressure, drainage is smoother.

Hidden drainage design, using vertical air pressure, drainage is smoother.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode

Outward | Open inward | Double inward opening | Open top hang | Internal opening and reversing



With hidden drainage design,
every detail is created for safer protection

123 SERIWS 1.4/2.0MM

BRIDGE BROKEN WINDOW SCREEN INTEGRATED
FLAT OPEN WINDOW

Product characteristics

Unique shape design of seamless welding, full of design sense, the overall shape is beautiful and safer

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

Multi-lock point design, the window sash is tightly fixed around the window when locked, and the anti-pry protection performance is better

Configure child safety locks to prevent accidents

Hidden drainage design, using vertical air pressure, drainage is smoother.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode

Outward | Open inward | Double inward opening | Open top hang | Internal opening and reversing

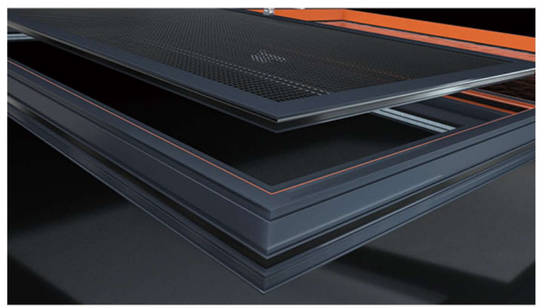

Details are the soul of the overall beauty,
The reasonable use of details and creative combination is beauty.
A good product has its own point of view, details witness quality,
The space with details is aesthetic.

145 SERIWS 1.4/2.0MM

BRIDGE BROKEN WINDOW SCREEN INTEGRATED
FLAT OPEN WINDOW

Product characteristics

Unique shape design of seamless welding, full of design sense, the overall shape is beautiful and safer

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

Multi-lock point design, the window sash is tightly fixed around the window when locked, and the anti-pry protection performance is better

Configure child safety locks to prevent accidents

Hidden drainage design, using vertical air pressure, drainage is smoother.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode

Outward | Open inward | Double inward opening | Open top hang | Internal opening and reversing



Details are the soul of the overall beauty,
The reasonable use of details and creative combination is beauty.
A good product has its own point of view, details witness quality,
The space with details is aesthetic.

Soundproofing performance

Thermal insulation performance

Watertight performance

Airtight performance

Wind pressure performance

BREATHE THE BREATH
OF FREEDOM

Anti-fall safety hinge

Eliminate high-level hidden dangers

Doors and windows are safe from falling

120 SERIWS 1.4/2.0MM

BRIDGE BROKEN WINDOW SCREEN INTEGRATED FLAT OPEN WINDOW

Product characteristics

The fixed position is different from the traditional graphics and square pressing lines. It adopts unique beveled edge pressing lines, and the window sash is flush with the inside and outside of the frame, and the overall appearance is beautiful and magnificent.

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

Multi-lock point design, the window sash is tightly fixed around the window when locked, and the anti-pry protection performance is better.

The automotive grade sealing strip is used, which has a good sealing effect and can effectively block rain and noise.

Hidden drainage design, using vertical air pressure, drainage is smoother.

Narrow edge design, unobstructed vision, large viewing area, simple and elegant.

Sound insulation performance | Thermal insulation performance | Water tightness performance | Air tightness performance | Wind pressure resistance performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode

Outward | Open inward | Double inward opening | Open top hang | Internal opening and reversing

With advanced narrow edge design, every detail is created for safer protection.

110 SERIWS 1.4/2.0MM

BRIDGE BROKEN WINDOW SCREEN INTEGRATED FLAT OPEN WINDOW

Product characteristics

Unique shape design, full of design sense, the overall shape is beautiful.

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

Multi-lock point design, the window sash is tightly fixed around the window when locked, and the anti-pry protection performance is better

Configure child safety locks to prevent accidents

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, high-end business clubs, etc.

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode



Super load bearing, safety protection and mosquito prevention

100 SERIWS 1.4/2.0MM

BRIDGE BROKEN WINDOW SCREEN INTEGRATED FLAT OPEN WINDOW

Product characteristics

Unique shape design, full of design sense, the overall shape is beautiful.

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

Multi-lock point design, the window sash is tightly fixed around the window when locked, and the anti-pry protection performance is better

Configure child safety locks to prevent accidents

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, high-end business clubs, etc.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode

Outward | Open inward | Double inward opening | Open top hang | Internal opening and reversing

Adopt stainless steel anti - fall rope device, every detail is created for safer protection

85 SERIWS 1.4/2.0MM

BRIDGE BROKEN WINDOW SCREEN INTEGRATED FLAT OPEN WINDOW

Product characteristics

Unique shape design, full of design sense, the overall shape is beautiful.

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

Multi-lock point design, the window sash is tightly fixed around the window when locked, and the anti-pry protection performance is better

Configure child safety locks to prevent accidents

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, high-end business clubs, etc.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode

Outward | Open inward | Double inward opening | Open top hang | Internal opening and reversing

Home, like a time stagger piano music, sometimes full of memories, sometimes passion atmosphere, sometimes muttering, and sometimes wto melodious, has been the same only quiet grace, slowly and beautiful.

75 SERIWS 1.4/2.0MM

NON - BROKEN BRIDGE OPEN WINDOW

Product characteristics

Unique shape design, full of design sense, the overall shape is beautiful.

Non-broken bridge design, using automotive-grade sealing strips, which can block heat transfer and have good sound insulation

Multi-lock point design, the window sash is tightly fixed around the window when locked, and the anti-pry protection performance is better

Configure child safety locks to prevent accidents

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, high-end business clubs, etc.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	None
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode



Outward | Open inward | Open top hang | Internal opening and reversing

Soak in the soft sunshine, enjoy lazy weekend time. The clouds swept through the clear sky, pouring down a bunch of shimmering gold, projection spots. The day was fine, and the air smelled of sunshine, warm and sweet.

65 SERIWS 1.4/2.0MM

BROKEN BRIDGE OPEN WINDOW

Product characteristics

Unique shape design of seamless welding, full of design sense, the overall shape is beautiful and safer

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

Multi-lock point design, the window sash is tightly fixed around the window when locked, and the anti-pry protection performance is better

Configure child safety locks to prevent accidents

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, and high-end business clubs.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode



Outward | Open inward | Open top hang | Internal opening and reversing

The hustle and bustle, competition, and pressure of the city often make people feel tired, and the inner dust flies and disturbs them. Therefore, the cool breath of nature is especially valuable.

55 SERIWS 1.4/2.0MM

BROKEN BRIDGE OPEN WINDOW

Product characteristics

Unique shape design of seamless welding, full of design sense, the overall shape is beautiful and safer

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

Multi-lock point design, the window sash is tightly fixed around the window when locked, and the anti-pry protection performance is better

Configure child safety locks to prevent accidents

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, and high-end business clubs.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode



Outward | Open inward | Open top hang | Internal opening and reversing

Of line scale fine take hold to let integral space appear more capacious, daylighting and scenery can enjoy the sitting room that connect fully to become the unique scenery line in the home at the same time.

50 SERIWS 1.4/2.0MM

BROKEN BRIDGE OPEN WINDOW

Product characteristics

Unique shape design of seamless welding, full of design sense, the overall shape is beautiful and safer

Broken bridge design, PA66 heat insulation strip, using automotive grade sealing strip, which can block heat transfer and has good sound insulation effect.

Multi-lock point design, the window sash is tightly fixed around the window when locked, and the anti-pry protection performance is better

Configure child safety locks to prevent accidents

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, and high-end business clubs.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	None
[Product features]	Glue injection process, one-piece molding crimping

Hardware accessories

Opening mode



Outward | Open inward | Open top hang | Internal opening and reversing

Wandering soul, always have a want to stay in the heart, time will not come again, but fortunately hope is still in, enjoy every minute of life.

70 SERIWS 1.4/2.0MM

WINDOW OF RESTORING ANCIENT WAYS

Product characteristics

High-quality magnesium-aluminum alloy profiles and high-quality hardware accessories are selected, the overall structure is stronger and anti-theft, and the safety performance is better and superior

The advanced surface treatment process of spraying wood grain or fluorocarbon can meet different styles of home matching, luxurious atmosphere, more durable and more beautiful.

The bottom sliding system has a strong load-bearing capacity, even when the door leaf is large, it can be pushed and pulled smoothly, steadily, and without noise, meeting the national wind pressure resistance standard

The EPDM sealing strip is used, which is weather-resistant, wear-resistant, anti-aging, water-tight and air-tight, and achieves a more comprehensive sealing effect.

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, and high-end business clubs.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process

Hardware accessories

Opening mode



Outward | Open inward

The beauty of the garden lies in the flowers and flowers, and the fish pond, which integrates the scenery of the joy of flowers and fish into the home, and feels the scenery between the opening.

Soundproofing performance

Thermal insulation performance

Watertight performance

Airtight performance

Wind pressure performance

The tranquility in the lead-colored world is simple and not simple, and the chaos and dazzling of colors fade away; the simplicity of luxury is subtle, and the delicacy of details is solidified;No flaws, timeless beauty

123 SERIWS 1.4/2.0MM

BRIDGE BREAK PUSH-PULL WINDOW

Product characteristics

High-quality magnesium-aluminum alloy profiles and high-quality hardware accessories are selected, the overall structure is stronger and anti-theft, and the safety performance is better and superior

The advanced surface treatment process of spraying wood grain or fluorocarbon can meet different styles of home matching, luxurious atmosphere, more durable and more beautiful.

The bottom sliding system has a strong load-bearing capacity, even when the door leaf is large, it can be pushed and pulled smoothly, steadily, and without noise, meeting the national wind pressure resistance standard

The EPDM sealing strip is used, which is weather-resistant, wear-resistant, anti-aging, water-tight and air-tight, and achieves a more comprehensive sealing effect.

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, and high-end business clubs.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process

Hardware accessories

Opening mode



Three-track push-pull

The wandering soul always has a heart that wants to stay. Time will not come again, but glad hope is still there. On a windy day, let's plant the seeds of love again. As long as there is rain and sunshine, life will flourish.

Soundproofing performance

Thermal insulation performance

Watertight performance

Airtight performance

Wind pressure performance

Bask in the soft sunshine and enjoy lazy weekend time. Flowing clouds pass across the clear sky, pouring down bunches of glittering golden light, projecting speckled spots The weather is fine, even the air smells of sunshine, warm and caring

105 SERIWS 1.4/2.0MM

BRIDGE BREAK PUSH-PULL WINDOW

Product characteristics

High-quality magnesium-aluminum alloy profiles and high-quality hardware accessories are selected, the overall structure is stronger and anti-theft, and the safety performance is better and superior

The advanced surface treatment process of spraying wood grain or fluorocarbon can meet different styles of home matching, luxurious atmosphere, more durable and more beautiful.

The bottom sliding system has a strong load-bearing capacity, even when the door leaf is large, it can be pushed and pulled smoothly, steadily, and without noise, meeting the national wind pressure resistance standard

The EPDM sealing strip is used, which is weather-resistant, wear-resistant, anti-aging, water-tight and air-tight, and achieves a more comprehensive sealing effect.

It is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, and high-end business clubs.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process

Hardware accessories

Opening mode



Three-track push-pull

Two-track push-pull

The wandering soul always has a heart that wants to stay. Time will not come again, but glad hope is still there. On a windy day, let's plant the seeds of love again. As long as there is rain and sunshine, life will flourish.

155 SERIWS 1.4/2.0MM

BRIDGE BREAK PUSH-PULL WINDOW

Product characteristics

High-quality magnesium-aluminum alloy profles and high-guality hardware accessories are selected, the overal structure is stronger and ant-theftand, the safety performance is better and superior

The advanced surface treatment process of spraying wood grain or fluorocarbon can meet diferent styles of home matching, luxurious atmosphere. more durable and more beautiful.

The bottom sliding system has a strong load-bearing capacity, even when the door leaf is large, it can be pushed and puled smoothly, steadily, and without noise, meeting the national wind pressure resistance standard

The EPDM sealing strip is used, which is weather-resistant, wear-esistant, ant-aging, water-tight and air-tight, and achieves a more comprehensive sealing effect.

it is suitable for large decoration spaces such as high-end villas, luxury residences, high-end hotels, and high-end business clubs.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Glue injection process

Hardware accessories

Opening mode



Three-track push-pull

Two-track push-pull

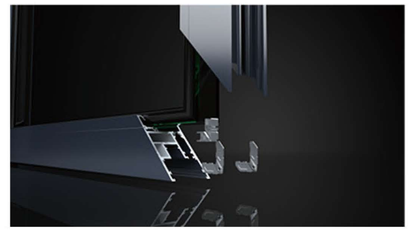

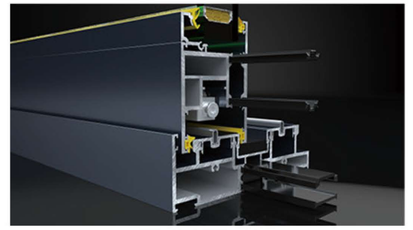

Soundproofing performance

Thermal insulation performance

Watertight performance

Airtight performance

Wind pressure performance

COMMON WINDOW TYPE REFENOE MAP

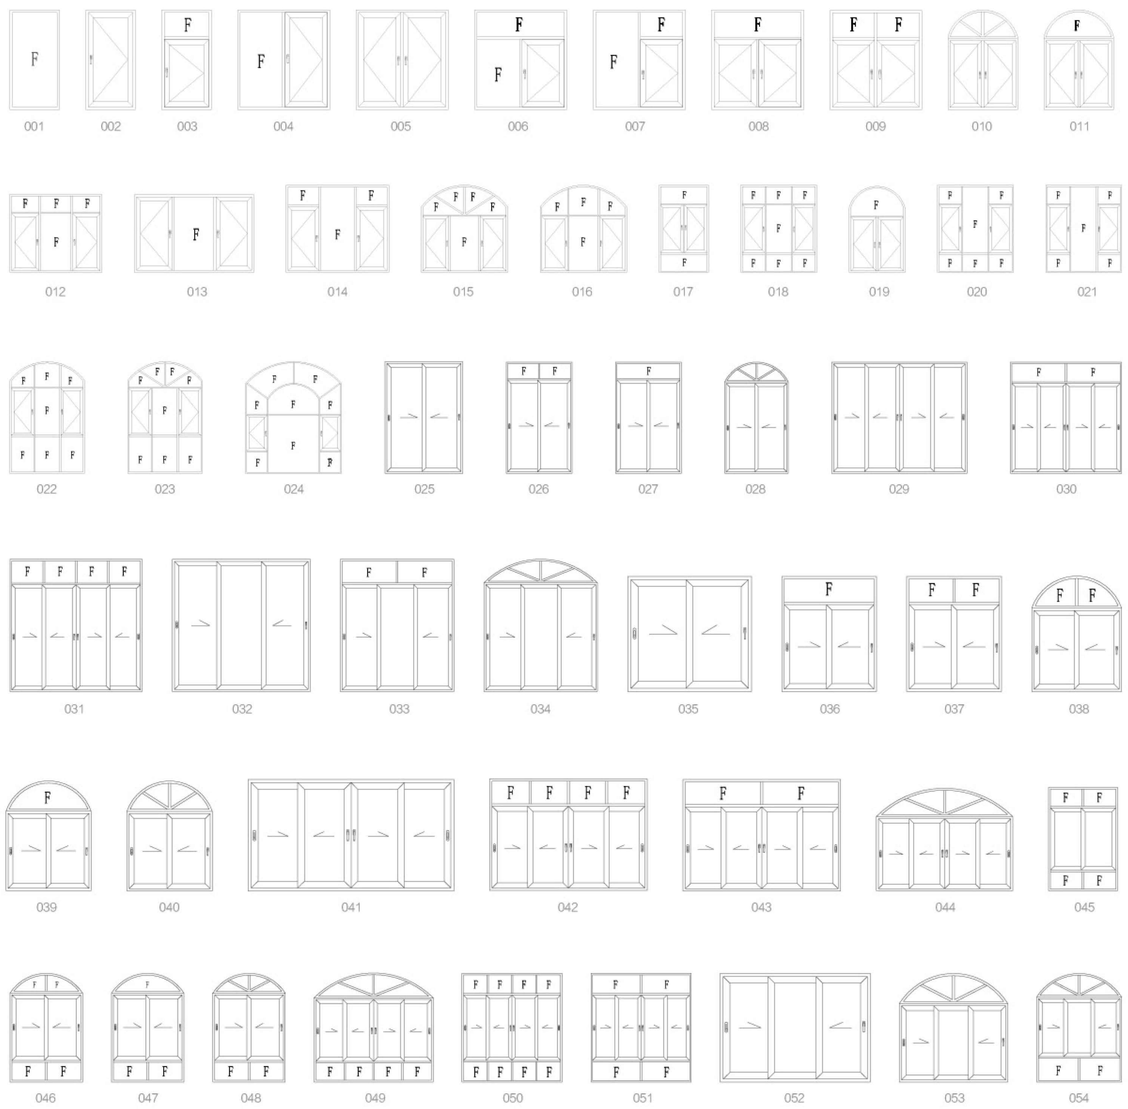



SLIDING SERIES

GIVE YOU A COMFORTABLE HOME

SERIES

OPTIONAL COLOR

Golden Oak

Yellow pear

Siamese rosewood

Fraxinus mandshurica

Hand-feeled wenge

Thai teak

Enamel white

White skin

Fluorocarbon gray

Bowl empty ash

Starbucks

Classic coffee

Classic Iron Ash

Dark skin

Black coffee

Fluorocarbon Champagne

190 SERIWS 1.4/2.0MM

HEAVY SLIDING DOOR

Product characteristics

Silicon bowl magnesium alloy aluminum, better performance, longer service life;

Two-component silicon steel glue hollow seal, filled with moisture-proof factor, 4-level noise prevention;

304 stainless steel silent track, embedded frame fan and lower rail structure, upper rail design with limited anti-sway rubber and anti-balance wheel

Multiple windproof wool tops and EPDM rubber strips are sealed to effectively reduce the noise of collision when closing the door;

Manufactured by high-precision imported equipment, reinforced with V-shaped corner codes, the product has a high safety factor and strong impact resistance.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	None
[Product features]	Luxury large handle/louver/King Kong mesh/standard grid

Hardware accessories

Opening mode



Three-track push-pull

Z-001
Color: bowl empty ash
Process: light glass

The wandering soul always has a heart that wants to stay. Time will not come again, but glad hope is still there. On a windy day, let's plant the seeds of love again. As long as there is rain and sunshine, life will flourish.

Soundproofing performance

Thermal insulation performance

Watertight performance

Airtight performance

Wind pressure performance



Z-002
Color: sand gray Process: optical glass

The tranquility in the lead-colored world is simple and not simple, and the chaos and dazzling of colors fade away; the simplicity of luxury is in the details, and the delicacy of details is solidified: no flaws are visible, and the eternal beauty is engraved.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

It is not possibly the most magnificent gift, possibly most lets pleasantly surprised which the human is elated; But it collects ties the love with was caring to the family member, the love, starts from my gate, transmission tender feeling infinite.

Z-003
Color: black crystal Process: optical glass

Z-004
Color: black crystal Process: optical glass



Stainless steel diamond gauze, every detail of the creation, only for safer protection

Soundproofing performance

Thermal insulation performance

Watertight performance

Airtight performance

Wind pressure performance

It is not possibly the most magnificent gift, possibly most lets pleasantly surprised which the human is elated; But it collects ties the love with was caring to the family member, the love, starts from my gate, transmission tender feeling infinite.

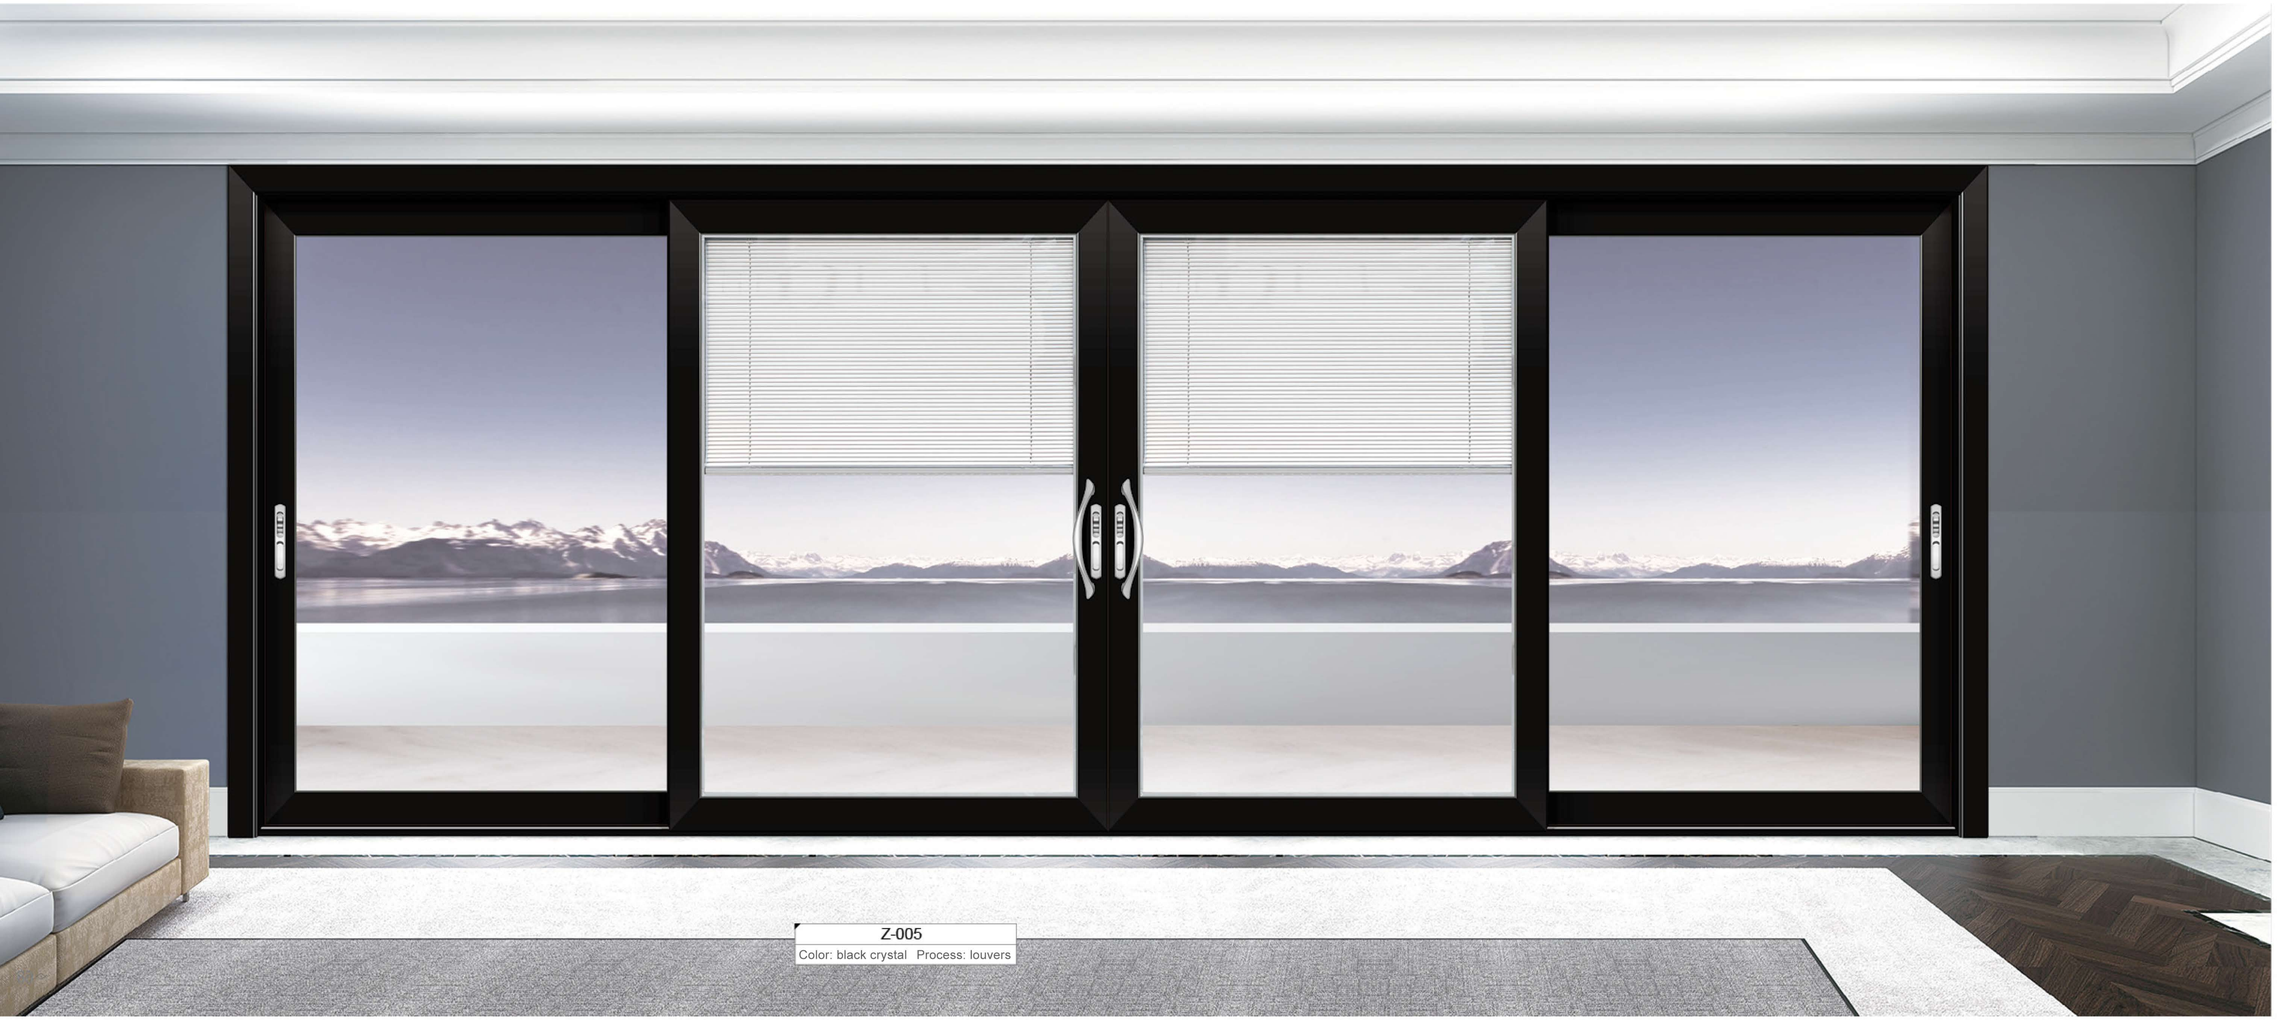

Z-005

Color: black crystal Process: louvers

Soundproofing performance

Thermal insulation performance

Watertight performance

Airtight performance

Wind pressure performance

Z-007

Color: Fluorocarbon gray Process: grid

它可能不是最华丽的礼物，可能不是最让人欢跃的惊喜；但它汇结着对家人的爱与关心，爱，从我门开始，传递温情无限。

It is not possibly the most magnificent gift, possibly most lets pleasantly surprised which the human is elated; But it collects ties the love with was caring to the family member, the love, starts from my gate, transmission tender feeling infinite.

Z-008

Color: Fluorocarbon gray

Process: grid + decorative flower

126 SERIWS 1.4/2.0MM

IMITATION HEAVY SLIDING DOOR

Product characteristics

Silicon bowl magnesium alloy aluminum, better performance, longer service life;

Two-component silicon steel glue hollow seal, filled with moisture-proof factor, 4-level noise prevention;

304 stainless steel silent track, embedded frame fan and lower rail structure, upper rail design with limited anti-sway rubber and anti-balance wheel

Multiple windproof wool tops and EPDM rubber strips are sealed to effectively reduce the noise of collision when closing the door;

Manufactured by high-precision imported equipment, reinforced with V-shaped corner codes, the product has a high safety factor and strong impact resistance.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	None
[Product features]	Luxury large handle/louver/King Kong mesh/standard grid

Hardware accessories

Opening mode



Three-track push-pull

Two-track push-pull

Z-013
Color: Dark Skin
Process: grid + decorative flower

Does not see really, if in the dreamland, dazzles ostentatiously waste, the person's shadow is ample; In homeward journey missing, only has you, lets the human more and more want to approach, no matter after death numerous colored world.

126 SERIWS 1.4/2.0MM

IMITATION HEAVY SLIDING DOOR

Does not see really, if in the dreamland, dazzles ostentatiously waste, the person's shadow is ample; In homeward journey missing, only has you, lets the human more and more want to approach, no matter after death numerous colored world.

Z-014
Color: Dark Skin
Process: grid + decorative flower

Z-015
Color: Dark Skin
Process: grid + decorative flower

Z-016
Color: Starbucks
Process: grid + decorative flower

Z-017
Color: Dark Skin
Process: grid + decorative flower

Z-018
Color: Dark Skin
Process: grid + decorative flower

190 SERIWS 1.4/2.0MM

BROKEN BRIDGE HEAVY SLIDING DOOR

Product characteristics

Silicon bowl magnesium alloy aluminum, better performance, longer service life;

Two-component silicon steel glue hollow seal, filled with moisture-proof factor, 4-level noise prevention;

304 stainless steel silent track, embedded frame fan and lower rail structure, upper rail design with limited anti-sway rubber and anti-balance wheel

Multiple windproof wool tops and EPDM rubber strips are sealed to effectively reduce the noise of collision when closing the door;

Manufactured by high-precision imported equipment, reinforced with V-shaped corner codes, the product has a high safety factor and strong impact resistance.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Luxury large handle/louver/King Kong mesh/standard grid

Hardware accessories

Opening mode



Three-track push-pull



Two-track push-pull

Z-021
Color: Starbucks
Process: grid + decorative flower

It abandons classical honored, forgot that Baroque's luxury, neglects Rococo's tedious, the only development is only simple and nature, satisfied if suddenly field dreamland.

190 SERIWS 1.4/2.0MM

BROKEN BRIDGE HEAVY SLIDING DOOR

Does not see really, if in the dreamland, dazzles ostentatiously waste, the person's shadow is ample; In homeward journey missing, only has you, lets the human more and more want to approach, no matter after death numerous colored world.

Z-022
Color: Fluorocarbon gray
Process: grid + decorative flower

Z-023
Color: Fluorocarbon gray
Process: grid + decorative flower

Z-024
Color: Enamel white
Process: grid

In the room pattern, he does not in relief oneself, harmonious builds friendly with the overall style; In the style performance, he does not have to make widely known specially, unique, and does not lose the erudite Confucian scholar, in standing still, gentleman handsome.

190 SERIWS 1.4/2.0MM

BROKEN BRIDGE HEAVY SLIDING DOOR

Does not see really, if in the dreamland, dazzles ostentatiously waste, the person's shadow is ample; In homeward journey missing, only has you, lets the human more and more want to approach, no matter after death numerous colored world.

Z-026
Color: Fluorocarbon gray
Process: light glass

120 SERIWS 1.4/2.0MM

BROKEN BRIDGE HEAVY SLIDING DOOR

Product characteristics

Silicon bowl magnesium alloy aluminum, better performance, longer service life;

Two-component silicon steel glue hollow seal, filled with moisture-proof factor, 4-level noise prevention;

304 stainless steel silent track, embedded frame fan and lower rail structure, upper rail design with limited anti-sway rubber and anti-balance wheel

Multiple windproof wool tops and EPDM rubber strips are sealed to effectively reduce the noise of collision when closing the door;

Manufactured by high-precision imported equipment, reinforced with V-shaped corner codes, the product has a high safety factor and strong impact resistance.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	PA66 heat insulation strip
[Product features]	Luxury large handle/louver/King Kong mesh/standard grid

Hardware accessories

Opening mode

Two-track push-pull

Has you fortunately, all become not such brewer's grain, has you fortunately, let the life have the respite rest region; Alone loves your that one kind, the simple nature, lets the heart be happy.

120 SERIWS 1.4/2.0MM

BROKEN BRIDGE HEAVY SLIDING DOOR

126 SERIWS 1.4/2.0MM

BROKEN BRIDGE HEAVY SLIDING DOOR

Z-035
Color: Dark Skin
Process: grid + decorative flower

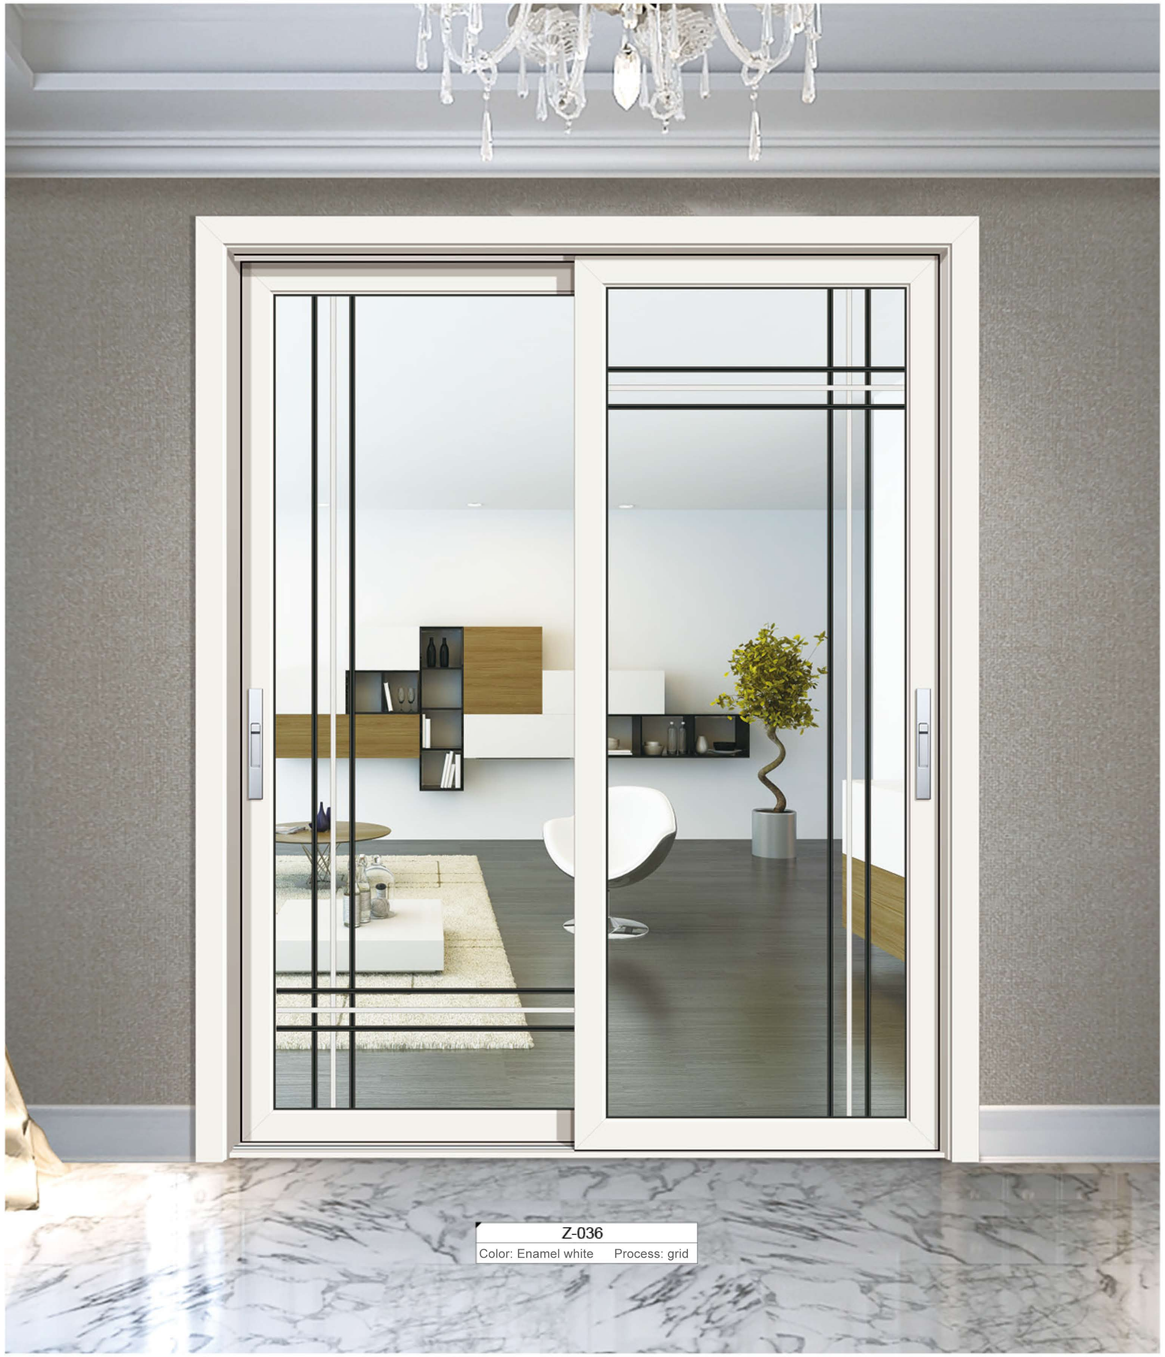

Z-036
Color: Enamel white Process: grid

The simple the visual effect, makes the impression which debates profoundly knows, perhaps is not magnificent shakes absorbs, actually for simple and elegant attracts, if spring breeze, extends the person mood.

120 SERIWS 1.4/2.0MM

NON－BROKEN BRIDGE HEAVY SLIDING DOOR

Product characteristics

Silicon bowl magnesium alloy aluminum, better performance, longer service life;

Two-component silicon steel glue hollow seal, filled with moisture-proof factor, 4-level noise prevention;

304 stainless steel silent track, embedded frame fan and lower rail structure, upper rail design with limited anti-sway rubber and anti-balance wheel

Multiple windproof wool tops and EPDM rubber strips are sealed to effectively reduce the noise of collision when closing the door;

Manufactured by high-precision imported equipment, reinforced with V-shaped corner codes, the product has a high safety factor and strong impact resistance.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

[Profile wall thickness]	1.4/2.0mm
[Glass configuration]	5+18A+5 Three-glass two-cavity hollow tempered glass
[Hardware brand]	HOPO (Germany Haobo) CMECH (American Simek)
[Sealant strip]	Automotive grade EPDM sealant
[Insulation tape]	None
[Product features]	Luxury large handle/louver/King Kong mesh/standard grid

Hardware accessories

Opening mode



Two-track push-pull

Z-037
Color: Starbucks
Process: grid + decorative flower

The youth is an unknown travel, from embarks simply, rushes develops the splendid life; Understands in the tranquility seeks, in moves in the world to discover the truth greatly, bursts out the dream fervor.

120 SERIWS 1.4/2.0MM

BROKEN BRIDGE HEAVY SLIDING DOOR

Z-038
Color: Fluorocarbon gray
Process: grid

Z-039
Color: dark skin
Process: grid + decorative flower

Has you fortunately, all become not such brewer's grain, has you fortunately, let the life have the respite rest region; Alone loves your that one kind, the simple nature, lets the heart be happy.

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

Z-042
Color: Enamel white
Process: grid + decorative flower

Z-043
Color: dark skin
Process: grid + decorative flower

In the morning looks at you to walk away, night was anticipating you return, has the day and night which very joyfully you accompany, because has your trust, I wait for with heart and soul for you am calm and steady.

Soundproofing performance

Thermal insulation performance

Watertight performance

Airtight performance

Wind pressure performance

Z-044
Color: Fluorocarbon gray
Process: grid

16 SERIWS 1.4/2.0MM

VERY NARROW SLIDING DOOR

LISTENS TO THE TIME NARRATION QUALITY

After the wasteful aristocrat, Yong Ya who passes through the imperial family, is reluctant to part with in magnificent Baroque; In thousand chapters of hundred revolutions, from to returns extravagantly to China simply, natural graceful, listens to the time narration quality the fable.

16 SERIWS 1.4/2.0MM

VERY NARROW SLIDING DOOR

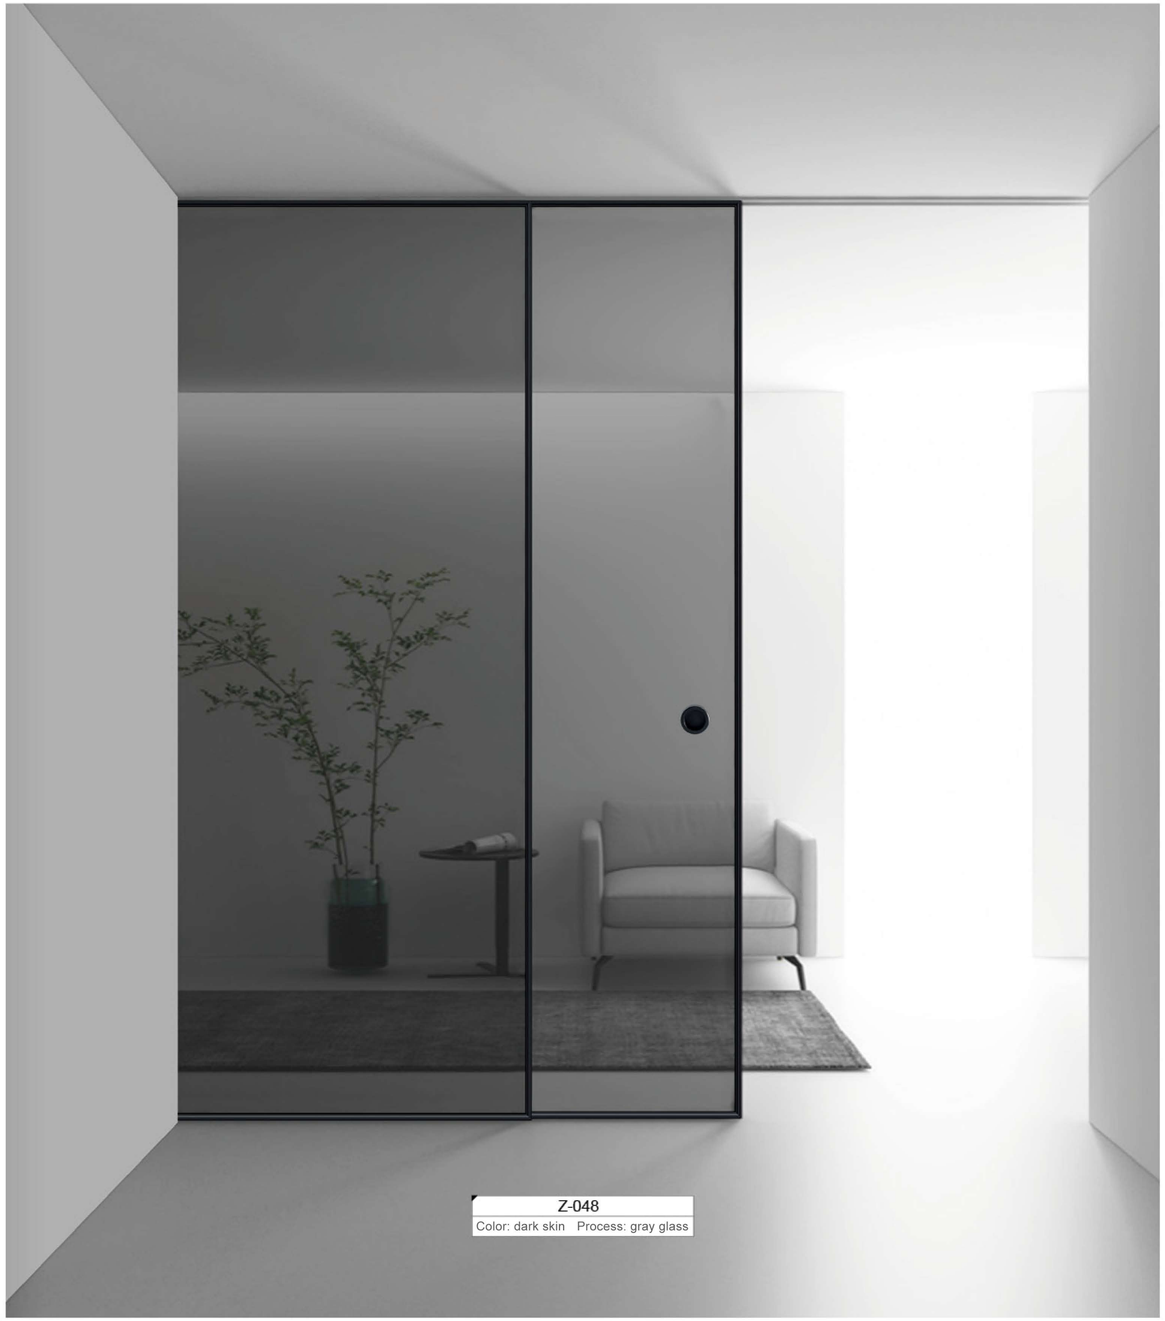

Z-048
Color: dark skin Process: gray glass

Z-049
Color: dark skin Process: gray glass

LISTENS TO THE TIME NARRATION QUALITY

After the wasteful aristocrat, Yong Ya who passes through the imperial family, is reluctant to part with in magnificent Baroque; In thousand chapters of hundred revolutions, from to returns extravagantly to China simply, natural graceful, listens to the time narration quality the fable.

Z-052
Color:Enamel white
Process:Changhong Glass

EXTREMELY NARROW THREE TRACK LINKAGE



When door a opens or closes,
It will slide with B and C fans at the same time,
Form linkage to open or close.

Z-053
Color:dark skin
Process:white frosted

Z-054
Color:Enamel white
Process:blue glass

Soundproofing performance

Thermal insulation performance

Watertight performance

Airtight performance

Wind pressure performance

Z-057
Color: dark skin Process: wired glass

16 SERIWS 1.4/2.0MM

VERY NARROW SLIDING DOOR

LISTENS TO THE TIME NARRATION QUALITY

After the wasteful aristocrat, Yong Ya who passes through the imperial family, is reluctant to part with in magnificent Baroque; In thousand chapters of hundred revolutions, from to returns extravagantly to China simply, natural graceful, listens to the time narration quality the fable.

FLAT DOOR SERIES

GIVE YOU A COMFORTABLE HOME

OPTIONAL COLOR

Golden Oak

Yellow pear

Siamese rosewood

Fraxinus mandshurica

Hand-feeled wenge

Thai teak

Enamel white

White skin

Fluorocarbon gray

Bowl empty ash

Starbucks

Classic coffee

Classic Iron Ash

Dark skin

Black coffee

Fluorocarbon Champagne

Z-063
Color: Dark Skin
Process: grid + decorative flower

Z-064
Color: Dark Skin
Process: grid + decorative flower

Z-065
Color: Dark Skin
Process: grid + decorative flower

Z-066
Color: Dark Skin
Process: grid + decorative flower

Z-067
Color: black crystal
Process: grid + decorative flower

Z-068
Color: black crystal
Process: grid + decorative flower

Z-069
Color: black crystal
Process: grid + decorative flower

Soundproofing performance

Thermal insulation performance

Watertight performance

Airtight performance

Wind pressure performance

Z-070
Color: Starbucks
Process: mirror flower

Z-071
Color: black crystal
Process: grid + dark flower

With the human who loves is on intimate terms falls in love lives in together, simple calm and steady, the joyful health, happiness lives by the heart, does not need luxuriously, simple foot.

16

EXTREMELY NARROW SWING DOOR

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

Z-072	
Color: Dark Skin	Process: grid

In the room pattern, he does not in relief oneself, harmonious builds friendly with the overall style; In the style performance, he does not have to make widely known specially, unique, and does not lose the erudite Confucian scholar, in standing still, gentleman handsome.

Z-073
Color: Dark Skin
Process: grid + decorative flower

Z-074
Color: Dark Skin
Process: grid + decorative flower

Z-075
Color: Dark Skin
Process: grid + decorative flower

Soundproofing performance | Thermal insulation performance | Watertight performance | Airtight performance | Wind pressure performance

Z-076
Color: Dark Skin
Process: grid + decorative flower

Z-077
Color: Dark Skin
Process: grid + decorative flower

FREE BEAUTIFUL SUNLIGHT

IAway from the hustle and bustle of prosperity, looking for a quiet life; Avoid the multicolored neon, choose true simple; The call of nature, let the heart from numerous to quiet, in the deep breath free to feel the sunshine for a long time.

Z-078
Color: Dark Skin
Process: grid + decorative flower

Z-079

In the morning looks at you to walk away, night was anticipating you return, has the day and night which very joyfully you accompany, because has your trust, I wait for with heart and soul for you am calm and steady.



FOLDING DOOR SERIES

GIVE YOU A COMFORTABLE HOME

OPTIONAL COLOR

milky white

white skin

dark skin

Titanium empty gray

75

HEAVY DUTY FOLDING DOOR

Product characteristics

Foldable design maximizes the opening space and allows you to fully see the external landscape

Adopt German high-grade folding system hardware accessories, exquisite and generous, flexible and smooth switch

The lower rail is designed with double waterproof rubber strips and a drainage system, which completely solves the problems of aging and leakage of rubber strips in the past.

The cavity adopts EPDM sealing strip, which is not easy to age and durable

To achieve a more comprehensive sealing effect. Suitable for large balconies and entrance doors of high-end residential buildings

Anti-pinch

Heaven and earth lock

Earth wheel

Soundproofing performance

Thermal insulation performance

Watertight performance

Airtight performance

Wind pressure performance

A PLACE TO
STORE HAPPINESS

All the beauty that the world gives is edited into a collection of memories.

16

HEAVY DUTY FOLDING DOOR

Folding door combination style:

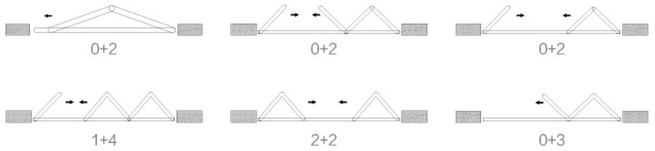

OUTDOOR SERIES

GIVE YOU A COMFORTABLE HOME

100 SUN ROOM

JAN SENDS PURELY
NATURE FUSION

Pay attention to the small details, pay attention to the modesty of vision, blend in the living room, naturally not artificial, convey the simplicity of cleanliness and add cleanliness and elegance.

Product characteristics

The sun room has different shapes and specifications, and the appearance is complete in color.There are flat roofs, curved roofs, single-sided slopes, herringbone, four-sided water outlets and various special-shaped roofs!

The sunshine room is exquisite in drainage design. Drainage channels are designed on the cross-section of its heat-insulating aluminum profiles to ensure that a small amount of rainwater and indoor condensed water that penetrate into the rubber strips are discharged outdoors in an orderly manner; aluminum alloy drainage grooves and drainage channels are designed on the eaves. The downpipe is used to receive the rainwater flowing from the top surface. The orderly drainage (seepage and condensation) design makes the rainwater on the roof and the top of the sun room flow into the gutter, drain or collect rainwater in an orderly manner through the downpipe, and discharge it to the sun room The bottom increases the watertightness of the entire sun room, and at the same time prevents the rainwater flowing down the slope from wetting pedestrians entering and leaving the sun room.

The sun room without heating facilities is an extension on the basis of the original building and is independent from the original building. The sun room itself does not need heating, it can act as a heat buffer to reduce the heat loss of the building, therefore, the sun room is extremely beneficial to balance the heat gain and loss of the entire building.

A heated sun room may or may not be connected to the original building. It can increase the building area, as a part of the Mu wall or an external hut; it can also balance the heat, the heat loss of the room and the solar heat energy absorbed by the sun room cancel each other out, and keep the indoor comfort

The doors and windows are convenient to match, and the design of the sun room is unified as the European standard notch, so as to match with other standard European standard notch doors and windows:

The service life of a good-quality sun room can reach about 50 years.

The sunshine room is easy to build, without cutting and welding on site, and will not bring too much noise and interfere with your life!

The style of the sun room needs to be customized according to the actual situation of the customer.
The following are only some optional conventional styles.

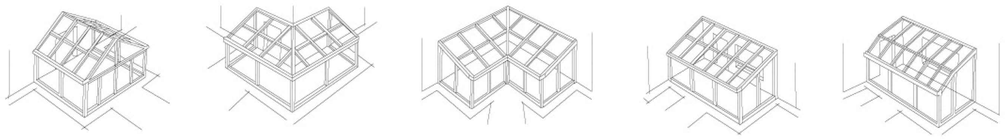

Special function customization

Built-in drain

Electric sliding sunroof

Electric sunshade

Herringbone sun room

European sun room

126 SUN ROOM

CUSTOMIZED DESIGN OF
SUN ROOM

—

Independent recessed lighting system

The sunshine room is equipped with an independent lighting system, which will not destroy the beauty of the interior.

Intelligent configuration system

Equipped with an intelligent configuration system, it can centrally control electric sunshade roller blinds/electric sunshade ceilings and electric window drives;

German professional waterproof solution

Adopt German professional waterproof solution, unique foundation guard plate and gutter water drop design, to achieve the best drainage performance requirements of the sun room;

126 SUN ROOM

A PLACE TO
STORE HAPPINESS

All the beauty that the world gives is edited into a collection of memories.

Continental PAVILION/ VINEYARD

Product characteristics

Reduce the weight of the grape trellis by using light and high-strength materials.

Using the optimal design method, using the finite element analysis method to obtain the mechanical model closest to the actual force.

Improve the high-strength bolt connection components to find a better and more reliable connection method.

It adopts high-strength parts formed at one time, reduces the number of parts, is easy to install, beautiful in appearance, and reliable in use.

Shape and structure: various structures, easy splicing, generous and stable, the best choice for outdoor leisure.

Continental PAVILION/ VINEYARD

BECAUSE OF ATTRACTIONSO
CLOSE

You have decorated in my eye happiness, does not seek the appropriate word to describe, is only is attracted deeply, nearness cannot help but.

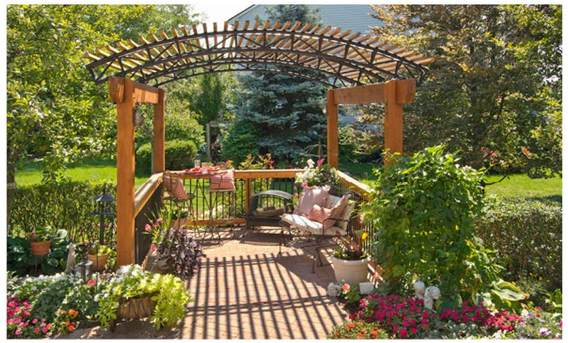

New Chinese style PAVILION/ VINEYARD

The idea of modern life is perfectly combined with the simple and fashionable style, which produces a harmonious environment in which aesthetics and crafts blend, and liberates people under pressure of life in a fresh, natural, relaxed and casual living environment.

CRANE SHED

A3 WINDOW SHED/ TERRACE SHED

A5 WINDOW SHED/ TERRACE SHED

DESIGN ,
HUMAN AND NATURE

High-end window sheds and terrace sheds advocate natural and fashionable design concepts, pay attention to the unity of style and function, have the characteristics of novel styles, exquisite workmanship, and various varieties, and are often used in high-end residential areas, villas or clubs, etc.